Dominion Carolina Gas Transmission, LLC 5000 Dominion Boulevard Glen Allen, Virginia 23060



November 3, 2015

WATER FACILITIES PERMITTING DIVISION

BY: HAND DELIVERY

SC Department of Health & Environmental Control Bureau of Water/NPDES Permit Administration 2600 Bull Street Columbia, SC 29201

RECEIVED

NOV 06 2015

RE: <u>Dominion Carolina Gas Transmission</u>
Columbia to Eastover Pipeline Project

Hydrostatic Test Water Discharge NOI Submittal

WATER POLLUTION CONTROL DIVISION

To Whom It May Concern:

Dominion Carolina Gas Transmission, LLC (DCG) is proposing the construction of an 8-inch steel gas transmission line which will span approximately 29 miles in lower Richland and Calhoun Counties in South Carolina, known as the Columbia to Eastover Project (Project). This new line is needed to provide natural gas to the International Paper facility in Eastover, SC to support its conversion from coal-fueled operations, and is targeted to be in service by the summer of 2016.

A small portion of the pipeline route, approximately 8%, resides in Calhoun County with the remaining 92% located in Richland County. The project will disturb approximately 37.4 acres of land within Calhoun County, which will include areas for the construction of the main pipeline route, additional temporary workspaces and temporary and permanent access roads. A portion of the proposed temporary and permanent access roads, in addition to the proposed pipeline, will encroach on privately maintained roadways.

For your information, the following additional permits or approvals will be applied for and obtained for this project, prior to construction:

DCG Columbia to Eastover Project Hydrostatic Test Water Discharge Permit Submittal November 3, 2015 Page 2 of 3

Permit/Approval	Administering Agency	4
Certificate of Public Convenience and Necessity	Federal Energy Regulatory Commission	
Section 404 Wetland Permit	U.S. Army Corps of Engineers - Charleston District	
Endangered Species Act - Section 7	U.S. Fish and Wildlife Service	
Consultation	(NOAA) National Marine Fisheries Service	
Notice of Intent (NOI) to Discharge Storm Water Associated with Construction Activities	South Carolina Department of Health and Environmental Control	
Notice of Intent (NOI) NPDES General Permit for Hydrostatic Test Water Discharges	South Carolina Department of Health and Environmental Control	
Section 401 Water Quality Certification	South Carolina Department of Health and Environmental Control	
State Endangered Species Consultation	South Carolina Department of Natural Resources	
National Historic Preservation Act Section 106 Consultation/Approval	South Carolina Department of Archives and History	
Tribal Consultations	Eastern Band of Cherokee Indians Catawba Indian Nation	
Application for State Easement to Tidelands or Submerged Lands (Navigable River Crossing)	South Carolina Budget & Control Board	
State Road Crossing Permits (Utilities)	South Carolina Department of Transportation	Dran
State Road Crossings Permits (Driveways)	South Carolina Department of Transportation	RECEIVEI NOV 0 6 2015
Railroad Crossing	Norfolk Southern Railway	NOV 0 6 2015
Railroad Crossing	CSX Transportation W/	TER POLLUTION CONTRO
Electric Transmission Crossing	SCE&G	DIVISION
Electric Transmission Crossing	Santee Cooper	
Gas Transmission Crossing	SCE&G	

This project involves the construction of natural gas transmission pipelines and facilities that will be incorporated into an existing natural gas transmission network that moves natural gas across state boundaries. Because of the nature and scope of this project, the Federal Energy Regulation Commission (FERC) will be a regulating authority for the project. Once all approvals and permits are secured and construction activities begin, FERC mandated environmental inspectors

DCG Columbia to Eastover Project Hydrostatic Test Water Discharge Permit Submittal November 3, 2015 Page 3 of 3

will be on site full-time to monitor construction activities during the full construction period, including environmental impact areas and sediment and erosion controls for both compliance and correction as needed.

Total test water discharge volume is calculated to be 533,492.3 gallons with no single discharge to exceed 415062.9962 gallons.

DCG is submitting the attached Hydrostatic Test Water Discharge Permit for your review and approval. Enclosed in the online submittal for your consideration is the following:

- 1 Signed Notice of Intent (NOI) for NPDES General Permit for Hydrostatic Test Water Discharges SCG 67000
- 1 Exhibit of Hydrostatic Test Water Discharge Locations (PDF file)

DCG appreciates your review of the enclosed information. Should you have any questions, please contact Mr. Richard Kopec by phone at (803) 726-3707, or by email at richard.kopec@carolinagastransmission.com.

Please send response to:

Richard Kopec Environmental Consultant Dominion Carolina Gas Transmission, LLC 220 Operation Way Cayce, SC 29033

Sincerely,

Paula A. Hamel

Director Gas Environmental Business Support

Dominion Resource Services, Inc.

Enclosures

CC: Mr. Jamie Barton - DCG (via email w/o enclosures)

Mr. Rick Kopec - DCG (via email w/o enclosures)

Mr. Fred Hanna, PE - URS (via email w/o enclosures)



NOV 0 6 2015
WATER POLLUTION CONTROL
DIVISION



Notice of Intent (NGI) NPDES General Permit for Hydrostatic Test Water Discharges SCG670000

Submission of this Notice of Intent constitutes notice that the party identified in Section I of this form intends to be authorized by a NPDES permit issued for Hydrostatic Test Water discharges in a State location identified in Section I of this form. Becoming a permittee obligates such a discharge to comply with all terms and conditions of the permit. ALL NECESSARY INFORMATION MUST BE INCLUDED WITH THIS FURM. AN ANNUAL OPERATING FEE OF \$180 IS REQUIRED FOR COVERAGE UNDER THIS PERMIT.

I. Facility/Operator Information			
and the fact that the first the transfer of the fact that	olina Gas Transmission Corporation	n	
Company Corporate Address: 220 C City: Cayce	perations way		ZiP; 29033
Phone: (803) 726-3715	· ·		ZiP: 29033
Operator Name: Rick Kopec - Dog		03) 733-4156	
Operator Name: <u>Rick Kopee - Doi</u> Operator Address: <u>220 Operations</u>	ASSAULT CARE COMMENTS		Phone: (803) 726-3707
_	State: SC ZIP:	29033	Operator Status: P
II. Facility Information			
	er Gas Pipeline Expansion Project		Phone; (803) 217-2144
Facility Contact Title: Jamie Borton,	Project Manager	County:	Richland
Mailing Address: 601 Old Taylor F	load		
City: Cayce		State: S	C ZIP: 29033
III. Permit Information			
	4922 2nd:	•	
			4th:
B. Does the facility currently have Hyd	rostatic Test Water General Permit cover	age? G Yes (Renewal)	SCG670001 G No (First Time NOI)
C. List any other NPDES or ND Permi	numbers for the facility: SC	SC	ND
IV. Discharge Information			· ·
LPG pipelines, used LPG pipelines, in LPG pipeline, used LPG pipeline pipelines);	o wastewater discharges covered by this new petroleum tanks, new petroleum pips is, new petroleum tanks, new petroleum tanks, new petrol	cijnes treed netrojemo tanke	and seed netroleum pinelines):
New 8 Inch diam	eter natural gas steel pipeline.		
B. Provide an approximate range of hyd having the following volume: a	trostatic wastewater discharge volumes the pproximately 534,000 gallons of wastern and the proximately 534,000 gallons of wastern and wa	nat are expected from this op aler	peration: One test will be performed
C. Describe any treatment that may be p used to to complete the test.	erformed prior to discharge and what typ	e: None. Municipal	water or raw filtered river water will be
List any expected toxic and/or hazard used to complete the tests.	lous poliutants and the reason for their pr	esence: <u>None. Munic</u>	cipal water or raw filtered river will be
Will be discharged to the unland	tructure located in an unland area of	ransmission right-of-wa	oject: The hydrostatic test water ay. The water will be discharged into ce, hay bales, check bales and other

ለዕሃ ዕ ේ 2015


For each discharge described in A on the previous page, please provide concentrations of the following parameters and indicate whether the data is based on actual sampling results or, if estimated, a source of the estimated value. Data must be representative of the facility's current operation. The average daily value is typically based on an average of the last 365 days of data. In the spaces provided, list any other pollutants believed present and their concentrations. If more than one discharge is present, make copies of the table and provide data for each discharge attached to

Total Suspended Solids (TSS) Total Residual Chlorine (TRC) Total Petroleum Hydrocarbons (TPH) Chromium (III) Copper Zinc Iron Lead Oppb Renzene Ethylhenzene Toluene Xylene Methyl Tert Butyl Ether (MTBE) Surfactants Provide the following test information: a. Type of structure to be tested: Approximately 28 b. Structure is: New G Existing c. Volume of test water for proposed discharge: App d. Expected date(a) for testing and discharge: June	ppb 0.10 b 0.0 ppm 0.03	32 ppm	Maximum Daily Value (include units) 8.4 s.u. 0 2.6 ppm 0* 0.11 pbb 0.89 ppb 0 * 0.182 ppm 7 ppb 0 * 0.7mg/L * 1 mg/L 10 mg/L 0**	Actual Data 2014 City of Columbia Water Quality Report *Based on EPA Limits - for drinking water Report if detected - no report if not detectable. **not tested estimated at 0 in city's drinking water
Total Suspended Solids (TSS) Total Residual Chlorine (TRC) 2.2 Total Petroleum Hydrocarbons (TPH) Chromium (III) 0.1 Copper 0 pp Zinc Iron 0.010 Lead 0 ppb Renzene Ethylhenzene Toluene Xylene Naphthalene Methyl Tert Butyl Ether (MTBE) Surfactants Provide the following test information: a. Type of structure to be tested: Approximately 2! b. Structure is: G New G Existing c. Volume of test water for proposed discharge: App d. Expected date(a) for testing and discharge: June e. Affected Landowners contacted: G Yes G Use the space below to bring to the Department's attention Attach an additional sheet if necessary. Hydrostatic tests are normal procedures utilized to with federal and state regulations and industry best	ppb 0.10 b 0.0 ppm 0.0	0 5 ppm 05 ppb 059 ppb	0 2.6 ppm 0* 0.11 pbb 0.89 ppb 0 * 0.182 ppm 7 ppb 0 * 0.7mg/L * 1 mg/L	Columbia Water Ouality Report *Based on EPA Limits - for drinking water Report if detected - no report if not detectable. **not tested estimated at 0 in city's drinking water
Total Residual Chlorine (TRC) 2.2 Total Petroleum Hydrocarbons (TPH) Chromium (III) 0.1 Copper 0 pp Zinc Iron 0.010 Lead 0 ppb Renzene Ethylhenzene Tolucne Xylene Naphthalene Methyl Tert Butyl Ether (MTBE) Surfactants Provide the following test information: a. Type of structure to be tested: Approximately 21 b. Structure is: G New G Existing c. Volume of test water for proposed discharge: App d. Expected date(s) for testing and discharge: June e. Affected Landowners contacted: G Yes G Use the space below to bring to the Department's attention Attach an additional sheet if necessary. Hydrostatic tests are normal procedures utilized to with federal and state regulations and industry best	ppb 0.10 b 0.0 0 ppm 0.0	5 ppm 05 ppb 059 ppb	2.6 ppm 0* 0.11 pbb 0.89 ppb 0 * 0.182 ppm 7 ppb 0 * 0.7mg/L * 1 mg/L	Columbia Water Ouality Report *Based on EPA Limits - for drinking water Report if detected - no report if not detectable. **not tested estimated at 0 in city's drinking water
Total Petroleum Hydrocarbons (TPH) Chromium (III) Copper O pp. Zinc Iron O.010 Lead O ppb Benzene Ethylhenzene Toluene Xylene Naphthalene Methyl Tert Butyl Ether (MTBE) Stricture a. Type of structure to be tested: Approximately 2the Structure is: G New G Existing c. Volume of test water for proposed discharge: App d. Expected date(s) for testing and discharge: Jame e. Affected Landowners contacted: G Yes G Use the space below to bring to the Department's attention Attach an additional sheet if necessary. Hydrostatic tests are normal procedures utilized to with federal and state regulations and industry best	ppb 0.10 b 0.0 0 ppm 0.0	05 ppb 059 ppb 32 ppm	0* 0.11 pbb 0.89 ppb 0 * 0.182 ppm 7 ppb 0 * 0.7mg/L * 1 mg/L	Ouality Report *Based on EPA Limits - for drinking water Report if detected - no report if not detectable. **not tested estimated at 0 in city's drinking water
Chromium (III) Copper O pp Zinc Iron O.010 Lead O ppb Renzene Ethylhenzene Chylene Naphthalene Methyl Tert Butyl Ether (MTBE) Surfactants Provide the following test information: a. Type of structure to be tested: Approximately 2! b. Structure is: G New G Existing c. Volume of test water for proposed discharge: App d. Expected date(s) for testing and discharge: Junu e. Affected Landowners contacted: G Yes G Use the space below to bring to the Department's attention Attach an additional sheet if necessary. Hydrostatic tests are normal procedures utilized to with federal and state regulations and industry best	b 0.0 0 ppm 0.03	32 ppm	0* 0.11 pbb 0.89 ppb 0 * 0.182 ppm 7 ppb 0 * 0.7mg/L * 1 mg/L	*Based on EPA Limits - for drinking water Report if detected - no report if not detectable. **not tested estimated at 0 in city's drinking water
Copper 0 pp. Zinc Iron 0.010 Lead 0 ppb Benzene Ethylhenzene Toluene Xylene Naphthalene Methyl Tert Butyl Ether (MTBE) Surfactants Provide the following test information: a. Type of structure to be tested: Approximately 2the b. Structure is: G New G Existing c. Volume of test water for proposed discharge: App. d. Expected date(s) for testing and discharge: Janu e. Affected Landowners contacted: G Yes G Use the space below to bring to the Department's attention Attach an additional sheet if necessary. Hydrostatic tests are normal procedures utilized to with federal and state regulations and industry best	b 0.0 0 ppm 0.03	32 ppm	0.11 pbb 0.89 ppb 0 * 0.182 ppm 7 ppb 0 * 0.7mg/L * 1 mg/L	Limits - for drinking water Report if detected - no report if not detectable. **not tested estimated at 0 in city's drinking water
Zinc Iron 0.010 I.ead 0 ppb Benzene Ethylhenzene Foluene Xylene Naphthalene Methyl Tert Butyl Ether (MTBE) Surfactants Provide the following test information: a. Type of structure to be tested: Approximately 2the Structure is: GNew GExisting c. Volume of test water for proposed discharge: App d. Expected date(s) for testing and discharge: June e. Affected Landowners contacted: GYes G Use the space below to bring to the Department's attention Attach an additional sheet if necessary. Hydrostatic tests are normal procedures utilized to with federal and state regulations and industry best	b 0.0 0 ppm 0.03	32 ppm	0.89 ppb 0 * 0.182 ppm 7 ppb 0 * 0.7mg/L * 1 mg/L	Report if detected no report if not detectable. **not tested estimated at 0 in city's drinking water
Renzene Chylhenzene Chylhenze) ppm 0.0:	32 ppm	0 * 0.182 ppm 7 ppb 0 * 0.7mg/L * 1 mg/L	Report if detected no report if not detectable. **not tested estimated at 0 in city's drinking-water
Renzene Ethylhenzene Ethylhenzene Foluene Kylene Naphthalene Methyl Tert Butyl Ether (MTBE) Eurfactants Provide the following test information: a. Type of structure to be tested: Approximately 2the b. Structure is: G New G Existing c. Volume of test water for proposed discharge: Appthalene d. Expected date(s) for testing and discharge: Jame e. Affected Landowners contacted: G Yes G Use the space below to bring to the Department's attention Attach an additional sheet if necessary. Hydrostatic tests are normal procedures utilized to with federal and state regulations and industry best			7 ppb 0 * 0.7mg/L * 1 mg/L	report if not detectable. **not tested estimated at 0 in city's drinking water
Benzene Chylhenzene Coluene Kylene Maphthalene Methyl Tert Butyl Ether (MTBE) Surfactants Provide the following test information: a. Type of structure to be tested: Approximately 2! b. Structure is: G New G Existing c. Volume of test water for proposed discharge: App d. Expected date(s) for testing and discharge: Junu c. Affected Landowners contacted: G Yes G Use the space below to bring to the Department's attention Attach an additional sheet if necessary. Hydrostatic tests are normal procedures utilized to with federal and state regulations and industry best			7 ppb 0 * 0.7mg/L * 1 mg/L	detectable. **not tested estimated at 0 in city's drinking water
Benzene Ethylhenzene Foluene Xylene Naphthalene Methyl Tert Butyl Ether (MTBE) Surfactants Provide the following test information: a. Type of structure to be tested: Approximately 2the b. Structure is: G New G Existing c. Volume of test water for proposed discharge: Appth. d. Expected date(s) for testing and discharge: Janu. e. Affected Landowners contacted: G Yes G Use the space below to bring to the Department's attention Attach an additional sheet if necessary. Hydrostatic tests are normal procedures utilized to with federal and state regulations and industry best			0 * 0.7mg/L * 1 mg/L	**not tested estimated at 0 in city's drinking water
Naphthalene Methyl Tert Butyl Ether (MTBE) Surfactants Provide the following test information: a. Type of structure to be tested: Approximately 21 b. Structure is: GNew G Existing c. Volume of test water for proposed discharge: App d. Expected date(s) for testing and discharge: Junt e. Affected Landowners contacted: GYes G Use the space below to bring to the Department's attention Attach an additional afrect if necessary. Hydrostatic tests are normal procedures utilized to with federal and state regulations and industry best			0.7mg/L * 1 mg/L : 10 mg/L	estimated at 0 in city's drinking water
Naphthalene Methyl Tert Butyl Ether (MTBE) Surfactants Provide the following test information: a. Type of structure to be tested: Approximately 2! b. Structure is: G New G Existing c. Volume of test water for proposed discharge: App d. Expected date(s) for testing and discharge: Junu e. Affected Landowners contacted: G Yes G Use the space below to bring to the Department's attention Attach an additional sheet if necessary. Hydrostatic tests are normal procedures utilized to with federal and state regulations and industry best			1 mg/L 10 mg/L	in city's drinking water
Naphthalene Methyl Tert Butyl Ether (MTBE) Surfactants Provide the following test information: a. Type of structure to be tested: Approximately 2th b. Structure is: G New G Existing c. Volume of test water for proposed discharge: Appthalene G. Expected date(s) for testing and discharge: Junu e. Affected Landowners contacted: G Yes G Use the space below to bring to the Department's attention Attach an additional sheet if necessary. Hydrostatic tests are normal procedures utilized to with federal and state regulations and industry best				drinking-water
Provide the following test information: a. Type of structure to be tested: Approximately 21 b. Structure is: G New G Existing c. Volume of test water for proposed discharge: App d. Expected date(s) for testing and discharge: Junu e. Affected Landowners contacted: G Yes G Use the space below to bring to the Department's attention Attach an additional sheet if necessary. Hydrostatic tests are normal procedures utilized to with federal and state regulations and industry best				
Provide the following test information: a. Type of structure to be tested: Approximately 21 b. Structure is: G New G Existing c. Volume of test water for proposed discharge: App d. Expected date(s) for testing and discharge: Janu e. Affected Landowners contacted: G Yes G Use the space below to bring to the Department's attention Attach an additional sheet if necessary. Hydrostatic tests are normal procedures utilized to with federal and state regulations and industry best				
Provide the following test information: a. Type of structure to be tested: Approximately 21 b. Structure is: G New G Existing c. Volume of test water for proposed discharge: App d. Expected date(s) for testing and discharge: June c. Affected Landowners contacted: G Yes G Use the space below to bring to the Department's attention Attach an additional sheet if necessary. Hydrostatic tests are normal procedures utilized to with federal and state regulations and industry best			0**	
a. Type of structure to be tested: Approximately 21 b. Structure is: GNew G Existing c. Volume of test water for proposed discharge: App d. Expected date(s) for testing and discharge: Junt e. Affected Landowners contacted: GYes G Use the space below to bring to the Department's attention Attach an additional aftect if necessary. Hydrostatic tests are normal procedures utilized to with federal and state regulations and industry best			0.5mg/L*	7
is anathed.	roximately 534,000 tary 6 - June 1, 201 No any additional informa	D gations 6 ation that you b	believe should be cons	performed in accordance
Certification rtify under penalty of law that this document and all attachme igned to assure that qualified personnel gather and evaluate th system, or those persons directly responsible for gathering the securate, and complete. I am aware that there are significant risonment for knowing violations. ponsible Person:Keith Windle	nts were prepared und	ler my direction ed. Based on n mation submit ing false inform	n or supervision in acc my inquiry of the pers lied is, to the best of m nation including the per- Phone: (803) 72	

DHEC 3729 (07/2002)

Signature:

Date: November 2, 2015

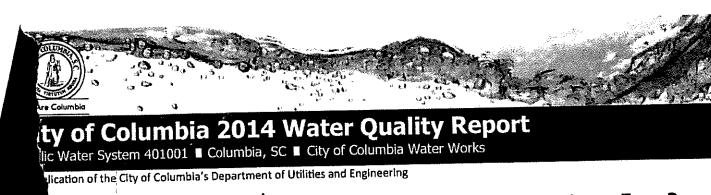

Only Columbia Tap Water **Delivers!**

umbia Water: guality on Tap Since 1835

The United States Environmental Protection Agency (EPA) and the South Carolina Department of Health and Environmental Control (DHEC) have established strict quality standards for drinking water. These standards are designed to protect consumers against disease-causing bacteria and other harmful substances. EPA requires public water systems to send their customers an annual report containing information about their drinking water quality and compliance with the standards. The City of Columbia hopes that this report will be both informative and helpful in making personal, health-based decisions regarding your drinking water consumption.

We welcome your comments and questions. We may be reached during normal business hours by calling 803-545-3300. You are also welcome to attend regularly scheduled meetings of City Council that are generally held the first and third Tuesdays of each month at City Hall, 1737 Main Street at 6:00 p.m. Contact the Public Relations

Department at 803-545-3020 for time and location or visit www.columbiasc.net

Where Does Columbia's Water Come From?

The City of Columbia operates two drinking water treatment plants. One draws water from the Broad River Diversion Canal (Canal Plant) and the other draws from Lake Murray (Lake Plant). The two plants together produce an average of 60 mlllion gallons of water per day. This water is furnished to approximately 375,000

people in Richland and Lexington counties through more than 2,400 miles of underground pipeline. The Lake Plant generally serves the area west of the Broad River and the area north of Interstate 20; the Canal Plant serves the remaining area.

The City of Columbia uses the following series of treatment techniques to produce its drinking water:

- 1. As water is pumped into the treatment plants, intake areas screen out floating debris such as plastic bottles, plants, and fish.
- 2. Aluminum sulfate (alum) and other treatment chemicals are rapidly mixed into the water to help particles in the water cling together or coagulate. This forms heavier particles, which are referred to as floc. The water mixture is then gently mixed so that coagulating particles continue to merge into larger floc particles.

- MEMBERIA COLUMNY

 SUPPLIES

 SUPPLIES
 - 3. These floc particles pass into a sedimentation basin where they settle to the bottom and are eventually removed.
 - 4. The water then passes through filters that contain layers of sand and anthracite coal that remove any remaining particles. The small floc particles cling to filter material as water passes through.
 - 5. After all particles have been removed, a small amount of chlorine is added to the water to keep bacterla from developing as it travels to your home or business. A small amount of fluoride is also added to the water to assist in preventing tooth decay.

DHEC has completed a comprehensive water assessment report on the Broad River Diversion Canal (also referred to as the Columbia Canal) and Lake Murray. These Source Water Assessment reports are available and can be reviewed at 1136 Washington Street or by contacting 803-545-3300.

City of Columbia water customers pay LESS THAN A PENNY PER GALLON for water available 24/7

on tapl



City of Columbia 2014 Water Quality Report

What is in Columbia's Drinking Water?

The City's drinking water met all state and federal requirements during 2014, and is considered safe to drink. The City's DHEC-certified laboratory performs more than 200,000 analyses each year to ensure that the water the City supplies to its customers meets all EPA and DHEC standards. Additional analyses are performed by DHEC, the state agency that regulates and oversees public water systems. Samples are tested at every stage of the treatment process

and at hundreds of points throughout more than 2,400 miles of pipeline that make up the City's distribution system. The City also conducts voluntary testing for microbial contaminants. Since 2004, the City has been participating in the Partnership for Safe Water. The Partnership's mission is to improve the quality of water delivered to customers by improving water system operations. The substances listed below were detected in the City's water supply during 2014.


Substance	Highest Level Allowed (MCL)	Detected Level	Range of Detection	Goal (MCLG)	Violated	Year Sampled	Source of Contaminant
INORGANIC CO	OMPOUNDS					**************************************	
Lead	15 ppb (Action Level)	0.0 ppb (90th%) 0-7 ppb (range)	No sites exceeded the action level	0	None	2014	Corrosion of household plumbing systems & naturally occurring in the environment*
Соррег	1.3 ppm (Action Level)	0.059 ppm (90th%) 0-0.089 ppb (range)	No sites exceeded the action level	0	None	2014	Corrosion of household plumbing systems & naturally occurring in the environment
Fluoride	4 ppm	0.54 ppm	0.52-0.56 ppm	4 ppm	None	2014	Naturally occurring in the environment by erosion of natural deposits and added at the treatment plants as an ald in preventing tooth decay
Nitrate/Nitrite (as Nitrogen)	10 ppm	0.23 ppm 0.1-0.36 pp		10 ppm	None	2014	Runoff from fertilizer use, leaching from septic tanks, sewage, erosion of natural deposits
Chlorite (Lake Plant)	1 ppm	0.664 ppm	0.342-0.664 ppm	0.8 ppm	None	2014	By-product of drinking water chlorination
Chlorite (Canal Plant)	1 ppm	0.589 ppm 0.275-0.589 ppm		0.8 ppm	None	2014	By-product of drinking water chlorination
ORGANIC COM	POUNDS						
Total Trihalomethanes (THMs) (Chloroform, Bromodichloromethane, Dibromochloromethane, Bromoform)	80 ppb	33 ppb (LRAA - Locational Running Annual Average)	17 - 48 ppb	O	None	2014	By-product of drinking water chlorination formed when chlorine reacts with organic matter
Haloacetic Acids (HAAs) (Honochloroacetic Acid, Menobromoacetic Acid, Dichloroacetic Acid, Dichloroacetic Acid, Dibromoacetic Acid, Dibromoacetic Acid)	60 ppb	37 ppb (LRAA - Locational Running Annual Average)	22-47 ppb	0	None	2014	By-product of drinking water chlorination formed when chlorine reacts with organic matter
Total Organic Carbon (Lake Plant)	π	45.26% removal (36.25% removal required) 36.30-58.10% removal		None	None	2014	Naturally occurring in the environment
Total Organic Carbon (Canal Mant)	π	44.48% removal (35.42% removal required) 31.90-61.50%** **Ratio met through atternate criteria		None	None	2014	Naturally occurring in the environment
MICROORGANI	SMS						
Turbidity (Lake Plant)	<0.3 NTU TT	0.20 NTU-Highest single measurement 100%-Lowest monthly percentage meeting standard		N/A	None	2014	Naturally occurring in the environment
Turbidity (Canal Plant)	<0.3 NTU TT	0.23 NTU-Highest single measurement 100%-Lowest monthly percentage meeting standard		N/A	None	2014	Naturally occurring in the environment
Total Coliform Bacteria	Presence of coliform bacteria in <5% of monthly samples.	4.4% (Highest monthly N/A percantage positive)		0	None	2014	Naturally occurring in the environment
DISINFECTANT	S						
Chloramine	4 ppm	2.5 ppm (Highest quarterly average)	2.2-2.6 ppm	4 ppm	None	2014	Water additive to control microbial growth
Chlorine Dioxide (Lake Plant)	800 ppb	190 ppb	0-190 ppb	800 ppb	None	2014	Water additive to control microbial growth
Chlorine Dloxide (Canai Plant)	800 ppb	497 ppb	0-497 ppb	800 ppb	None	2014	Water additive to control microbial growth

^{*}If present, elevated levels of lead can cause serious health problems, especially for pregnant women and young children. Lead in drinking water is primarily from materials and components associated with service line and home plumbing. The City of Columbia is responsible for providing high quality drinking weter, but cannot control the variety of materials used in plumbing components. When your water has been sitting in your place for several hours, you can minimize the potential for lead exposure by flushing your tap for 30 seconds to 2 minimize before using water for drinking or cooking. If you are concerned about lead in your water, you may wish to have your water tested. Information on lead in drinking water, testing methods, and steps you can take to minimize exposure is available from the Safe Drinking Water Hotshe at (800) 426-4791 or online at https://www.epa.gov/safewater/lead.

What Has Columbia Been Up to Over the Past Year?

The City of Columbia Water Works constantly evaluates the health of its water treatment and distribution systems. This year the City completed a \$2.7 million dollar project called the "Chapin Booster Pump Station". This drinking water pump station off of Broad River Road provides an additional source of water to the entire town of Chapin. This pump station supplies up to three million gallons of drinking water per day, and is designed so that it can fill a planned 750,000 gallon water storage tank in the Town of Chapin. This project will help ensure reliable service to the town for many years into the future.

Above, right: The Chapin booster pump station. Right: A look inside the new booster pump station.

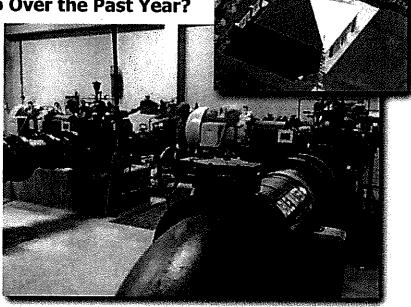

What Do These Terms and Symbols Mean?

Action Level — A limit, that is not a MCL, that applies to contaminants such as lead and copper that enter the water after treatment. Action levels may trigger special monitoring, public education or treatment techniques.

Detected Level — The concentration of a substance detected in a water sample. The detected levels specified in the table to the left are the highest levels detected if multiple samples were collected, except for Total Organic Carbon (TOC) or unless specified otherwise. For TOC, the specified removal rate is the rate required by DHEC based on data reported by the City.

HRL (Health Reference Level) — An EPA-defined benchmark for evaluating contaminant occurrence based on health effects information.

LRAA (Locational Running Annual Average) — An average at each sample point for four quarters in the calendar year.

MCL (Maximum Contaminant Level) — EPA's regulation limit for the highest allowable amount of a substance in drinking water.

MCLG (Maximum Contaminant Level Goal) — The EPA's target level for a contaminant below which there are no known or suspected health effects. The MCLG is not necessarily a level achievable with currently available treatment techniques.

N/A (Not Applicable) — Does not apply.

NTU (Nephelometric Turbidity Unit) — Units of measure to indicate water clarity.

ppb (parts per billion) — One part in a billion parts (equivalent to one penny in \$10,000,000).

ppm (parts per million) — One part in a million parts (equivalent to one penny in \$10,000).

TT (Treatment Technique) — A required process intended to reduce the level of a contaminant in drinking water.

90th% (90th Percentile) — The Action Level for lead and copper for a water system that serves more than 100,000 people.

- < Less than.
- > Greater than.

EPA requires that all annual water quality reports contain the following:

Drinking water, including bottled water, may reasonably be expected to contain at least small amounts of some contaminants. The presence of contaminants does not necessarily indicate that water poses a health risk. More information about contaminants and potential health effects can be obtained by calling EPA's Safe Drinking Water Hotline (800-426-4791).

The sources of drinking water (both tap water and bottled water) include rivers, lakes, streams, ponds, reservoirs, springs, and wells. As water travels over the surface of the land or through the ground, it dissolves naturally occurring minerals and radioactive material, and can pick up substances resulting from the presence of animals or from human activity.

Contaminants that may be present in source water include:

*Microbial contaminants, such as viruses and bacteria, which may come from sewage treatment plants, septic systems, agricultural livestock operations, and wildlife.

*Inorganic contaminants, such as salts and metals, which can be naturally occurring or result from urban stormwater runoff, industrial or domestic wastewater discharges, oil and gas production, mining, or farming.

*Pesticides and herbicides, which may come from a variety of sources such as agriculture, stormwater runoff, and residential uses.


*Organic chemical contaminants, including synthetic and volatile organics, which are by-products of industrial processes and petroleum production and can also come from gas stations, urban stormwater runoff, and septic systems.

*Radioactive contaminants, which can be naturally occurring or be the result of oil and gas production and mining activities.

In order to ensure that tap water is safe to drink, EPA prescribes regulations that limit the amount of certain contaminants in water provided by public water systems. Federal Drug Administration regu-

lations establish limits for contaminants in bottled water, which must provide the same protection for public health.

Some people may be more vulnerable to contaminants in drinking water than the general population. Immuno-compromised persons, such as persons with cancer undergoing chemotherapy, persons who have undergone organ transplants, people with HIV/AIDS or other immune system disorders, some elderly, and infants, can be particularly at risk from infections. These people should seek advice about drinking water from their health care providers. EPA/CDC guidelines on appropriate means to lessen the risk of infection by Cryptosporidium are available from the Safe Drinking Water Hotline (800-426-4791). Testing since 1994 has revealed no signs of Cryptosporidium in Columbla's treated water.



City of Columbia 2014 Water Quality Report

2014 UCMR 3 Unregulated Contaminants

Unregulated contaminants are those substances that do not have a drinking water standard set by EPA. Every five years, EPA is required by the Safe Drinking Water Act to identify a list of potential contaminants, make a rule for water systems to test for them, and then make a decision whether regulation is necessary. As part of the Unregulated Contaminant Monitoring Rule 3 (UCMR 3), DHEC recently tested Columbia's treated and distribu-

tion system water for 30 unregulated contaminants. Twenty-three of the contaminants under review were not detected, but seven were detected. Those contaminants that were detected are included in this report. If you have any questions about these results or are interested in the full list of contaminants that were monitored, please contact Jonathan Sherer at (803)255-8160.

Substance	Location	Units	Health Reference Level	Average*	Range	Sources and Notes	
	Canal Plant			0.104	0.098-0.11		
Chromlum-6	Lake Murray Plant		0.1 ppb (California)	0.075	0.097-0.053		
Chiomidata-6	Distribution System 1	ppb		0.105	0.1-0.11	Naturally-occurring element	
	Distribution System 2			0.083 ≥≅	0:069-0:097	1	
	Canal Plant			0.265	0.25-0.28	Outle sliphatte other good as a set set as a first	
1,4 Dioxane	Leke Mucrey Plant	ppb	0.35 to 35 ppb (EPA)	# 0.036	0-0.072	Cyclic aliphatic ether; used as a solvent or solvent stabilizer in manufacturing and processing of	
1, roloxanc	Distribution System 1	րիս	0.8 ppb (California)	0	0	paper, cotton, textile products, automotive coolant,	
	Distribution System 2			0,	0.0	cosmetics, and shampoos	
	Canal Plant			0.15	0-0.3	See Chromium-6 for use or source information; though the	
Total	Lake Murray Plant	ррь	100 ppb	0.15	0.0.3:	amount measured when analyzing for "total chromium" is the	
Chromlum	Distribution System 1	ppo	100 ppc	0.13	0-0.26	sum of chromium in all of its velence states, the MCL for EPA's current total chromium regulation was determined based	
	Distribution System 2.			0.115	0-0.23	upon the health effects of chromium-6	
	Canal Plant			2.55	2.5-2.6		
Molybdenum	Loke Murray Plant	ppb	40 ppb	0	4. 10	Maharatha ann an ann an	
	Distribution System 1	PPO	ηο ρρφ	2.65	2.5-2.8	Naturally-occurring element	
	Distribution System 2			第一0 常宝	0		
	Canal Plant			47.5	42-53		
Strontium	Lake Murray Plant	ppb	4,000 ppb	55.5	52-59	Blade with a new colon of the section	
,	Distribution System 1	PPO	1,000 ppo	50.5	49-52	Naturally-occurring element	
	Distribution System 2			53	50-56		
	Canal Plant			1.15	1.1-1.2		
Vanadlum	Lake Murray Plant	ppb	21 ppb	0.865	◎ 0.9 -0.93 ◎	Naturally-occurring elemental metal	
	Distribution System 1			1.15	1.1-1.2	Materially occurring elemental (fleta)	
	Distribution System 2			0.82	0.76-0.88		
	Canal Plant			305	280-330	Disinfection byproduct. Although the results found are	
Chlorate	Lake Murray Plant	ppb	pb 210 ppb (EPA)	190	170-210	higher than the Health Reference Level, regulatory limits are potentially in the range of 500 - 700 ppb. The City of	
	Distribution System 1	,, <u> </u>	700 ppb (California)	315	290-340	Columbia would not have exceeded the probable regulatory	
	Distribution System 2			220	210-230	limits for this chemical.	

^{*}From two sampling events in 2014. Additional monitoring scheduled for 2015.

Finished Water Secondary Standards

Some attributes of water, which are listed in the table below, affect the taste, odor, and hardness of our drinking water. Because these attributes of water do not impact a person's health, EPA has established secondary standards that are non-enforceable, recommended guidelines. The City meets these guidelines in addition to the regulations set forth by EPA.

For commercial customers with boilers or chillers, breweries, and other customers who need additional information, please contact Jonathan Sherer, Water Works Specialist, at (803) 255-8160 or jdsherer@columbiasc.net.

Parameter	Units	MCL	Range	Average	Possible Sources
Chloride	ppm	250	7-12	10	Soil runoff
Color	Color units*	15	0	0	Naturally-occurring
Iron	ppm	0.3	0.010-0.182	0.032	Soil runoff, pipe material
Manganese	ppm	0.05	0.005-0.011	0.006	Soil runoff
pН	s.u.**	6.5-8.5	7.4-8.4	8	Controlled at treatment plant
Sulfate	ppm	250	10-18	15	Drinking water additive
Total Dissolved Sollds	ppm	500	16-164	55	Soil runoff
Conductivity	µmho/cm	No standard	110-141	123	Naturally-occurring
Alkalinity	ppm	No standard	23-28	25	Drinking water additive

^{*} A standard scale that was developed for measuring color intensity in water samples.

For additional information:

City of Columbia Water Quality Complaints/Billing/Customer Care Center 803-545-3300

S.C. Department of Health and Environmental Control/Bureau of Water 803-898-4300

EPA Drinking Water Hotline 800-426-4791

National Lead Information Clearinghouse 800-424-LEAD

Consumer Product Safety Commission 800-638-2772

Please visit us at: columbiasc.net/ drinkingwater

Esté informe contiene informacion muy importante sobre el agua que usted toma. Traduscalo o hable con un amigo quien lo entienda

bien.

FUN FACT DROPLET

On average,
Americans use about
100 GALLONS
of water
per person
each day.

^{**} Standard unit (s.u.); pH is measured on a logarithmic scale, ranging from 0 to 14 s.u., with 7 s.u. being neutral pH.